



REV.	DESCRIPTIONS	DATE	APPRO.
Α	EXIT HOLES WERE SLOTS	10/9/14	
В	ECN 15-07: HOLES DISTANCE WAS 1/2"	1/16/15	

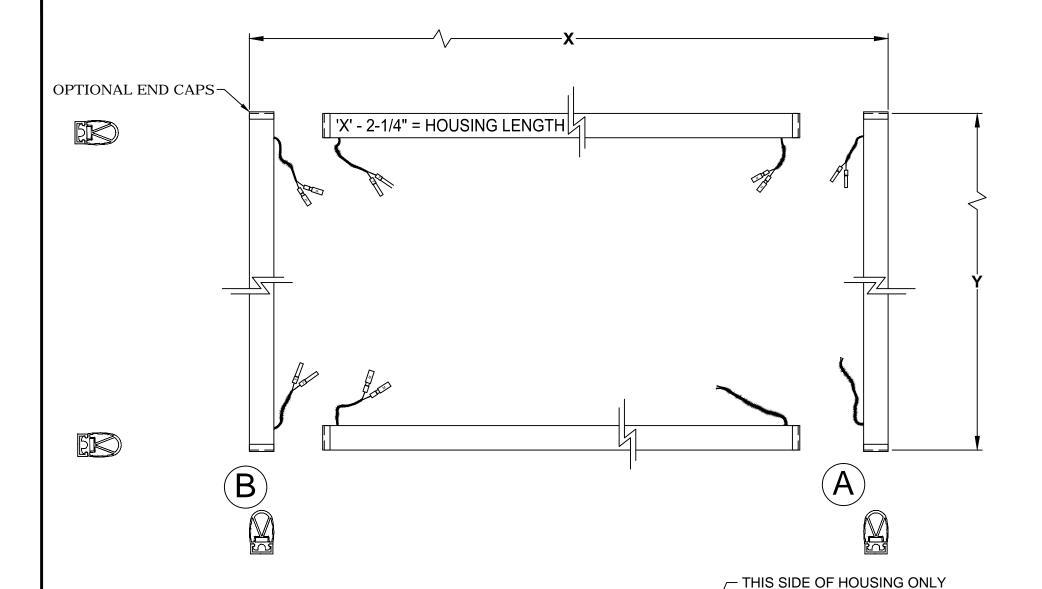

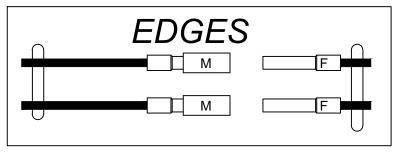

MALE PLUG TS P/N 13368 FEMALE SOCKET TS P/N 13369

TS-48 NOTCHED ENDS									
TABLE SIZE DIMENSIONS		LEAD LOCATION (LENGTH)							
Х	Y		Α	-Ol	₹-	В			
		()		()	·		

NOTES:

PART #:

- 1. TS-48 HOUSNIG, SPECIFY COLOR, STD-BLK
- 2. OPTIONAL END CAPS
- 3. LEADS ARE 20/2 Ø3/16 SPECIFY LENGTH, 72 IN STD
- 4. INTERCONNECTS ARE 22/2 4" LONG CONNECTORIZED
- 5. X AND Y = TABLE SIZE
- 6. HOUSINGS NOTCHED ENDS INBOUND FOR I/C EXIT SEE DETAIL 'A'

MAT'L: n/a

7. TOLERANCES ARE ±1/8"

OPTIONAL NOTES:

TS-48, AF, F/S, EE, W/ CONN.

GENERIC DRAWING

APPD

DATE 4/11/1

TAPESWITCH CORPORATION

SIZE

DRAWING NUMBER

TAPESWITCH CORPORATION

FARMINGDALE, NEW YORK, U.S.A.

THIS SIDE OF HOUSING ONLY

TS-48 MODIFICATION

DETAIL A

B P11-4-4

OF 2

SHEET 1